




SMART LOCK


Specifications

Power	4.5 - 6V
Battery	4 1.5V AA alkaline batteries
User code capacity	20 (6 digits)
User card capacity	100
Operation temperature	-10~70°C (14~158°F)
Dimension	66(W) x 227(H) x 78(D)mm

- * Emergency key
- * Micro USB power supply hub
- * Low battery voltage indicator
- * Glass , wooden or aluminum panel available

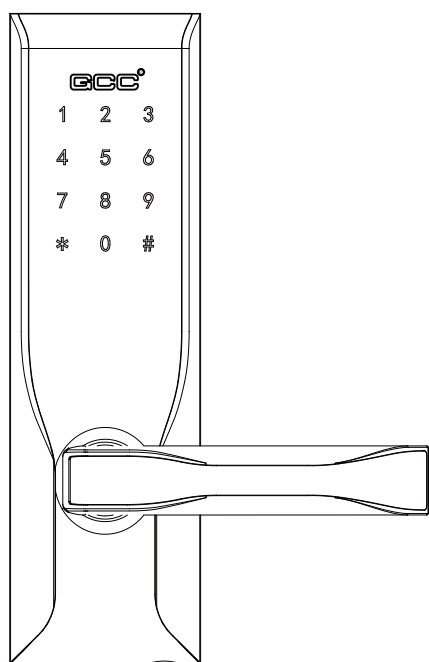


SML - 10T (For glass panel)
SML - 11T (For wood/aluminum panel)

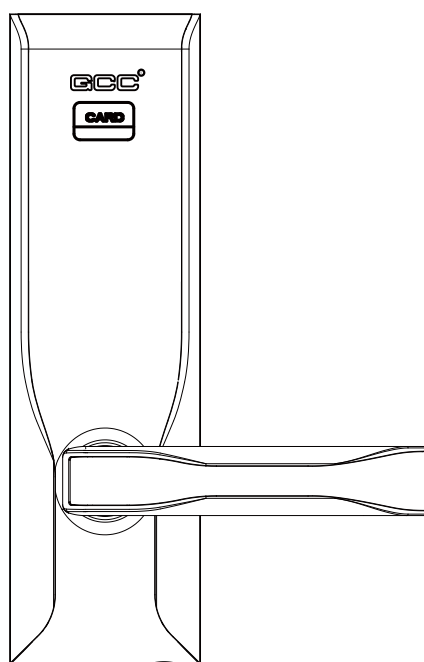

SML - 10C (For glass panel)
SML - 11C (For wood/aluminum panel)

LH-86 Lever Hinge

SGS 200,000 cycles endurance test passed (2 hinges for 60kg glass panel)

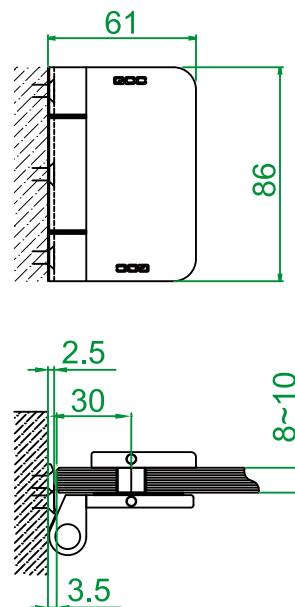

* Glass to glass 90° or 180° type available

Please refer to GCC LH-86 brochure for more information



GOOD CREDIT CORPORATION

<http://www.gccintw.com.tw> ✉ :gcctw@ms7.hinet.net

No.13, Longmen Rd., Situn Dist., Taichung 40757, Taiwan

TEL:886-4-22583755 FAX:886-4-22583753

Member
NGA
National Glass
Association