

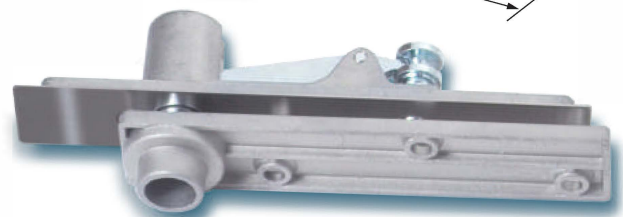
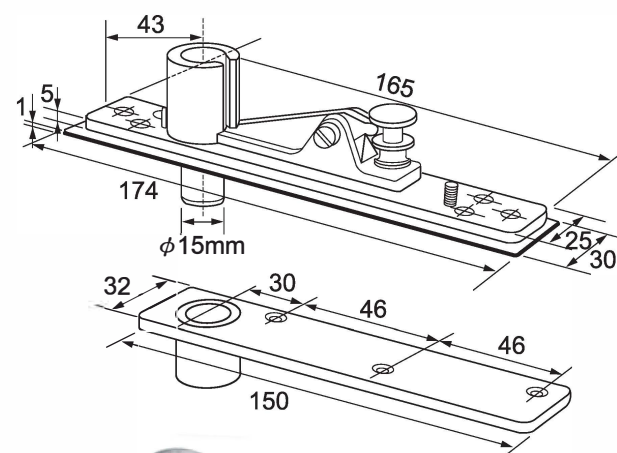



9118/9 Top centre Ø15mm pin

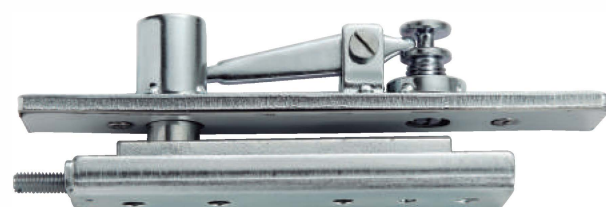


9180 Adjustable top centre Ø15mm pin

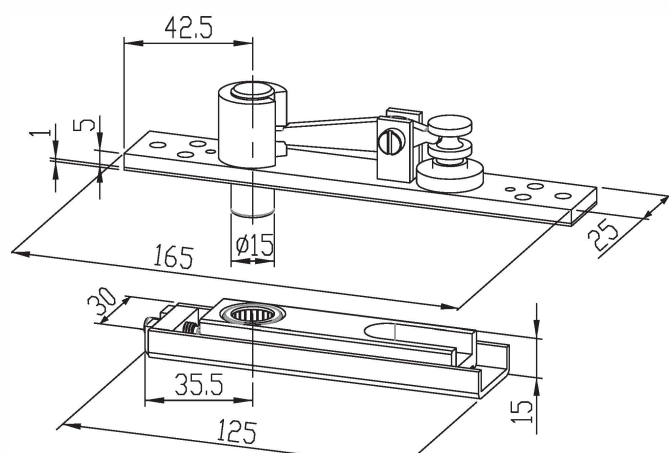


9123L Door strap

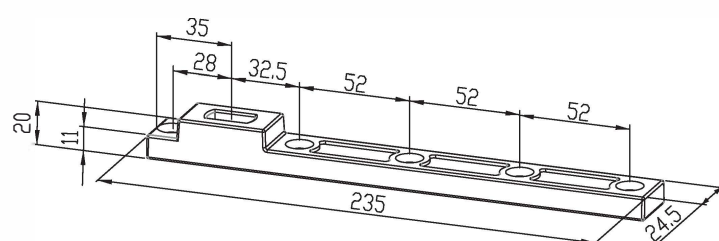


9123XL Door strap

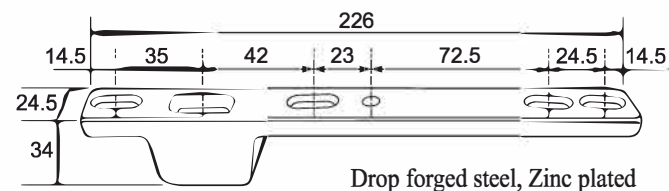

9149TC Offset top centre

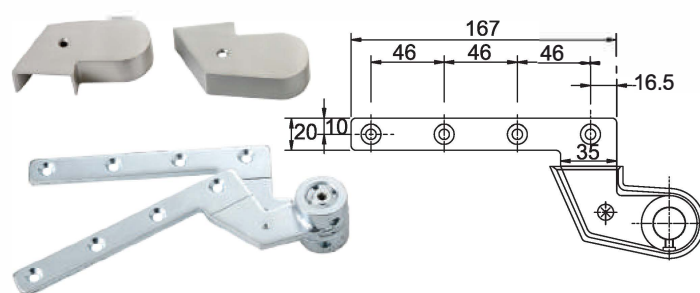

9149DS Offset Door strap

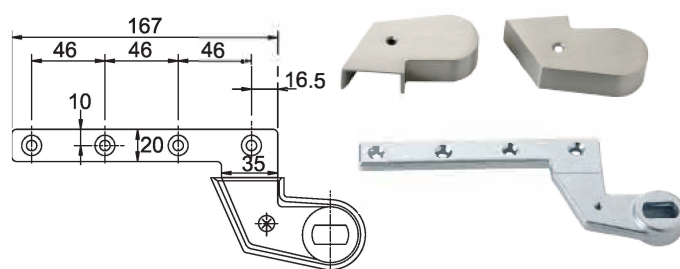

Agent/Distributor

Heavy Duty Cam System

Double Action

Floor Spring



GTS-750V



GTS-800



Technical Data


Power size	1	2	3	4
Max. Door width (mm)	800	900	1000	1100
Max. Door weight (kgs.)	150			

Features :

- Adjustable power size 1-4 EN compliance.
- Adjustable closing & latching speed.

Max opening angle
130°/170°/190°
depend on various
models/applications.

Speed Increase (⊗) Speed Decrease (⊙)

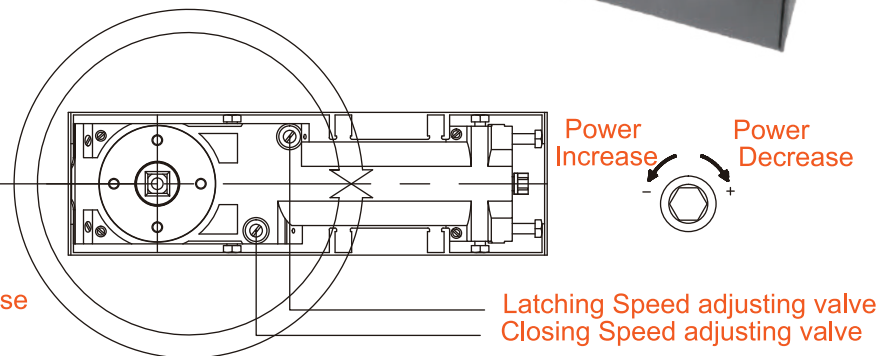

Ordering Code with max. opening angle


GTS-750V:130° for double action application. Non-hold open is available by order

GTS-757V:170° for single action application. Non-hold open is available by order

GTS-759VR:190° particularly application along with electromagnetic hold open(right open door).

GTS-759VL:190° particularly application along with electromagnetic hold open(left open door).

Dimensions :

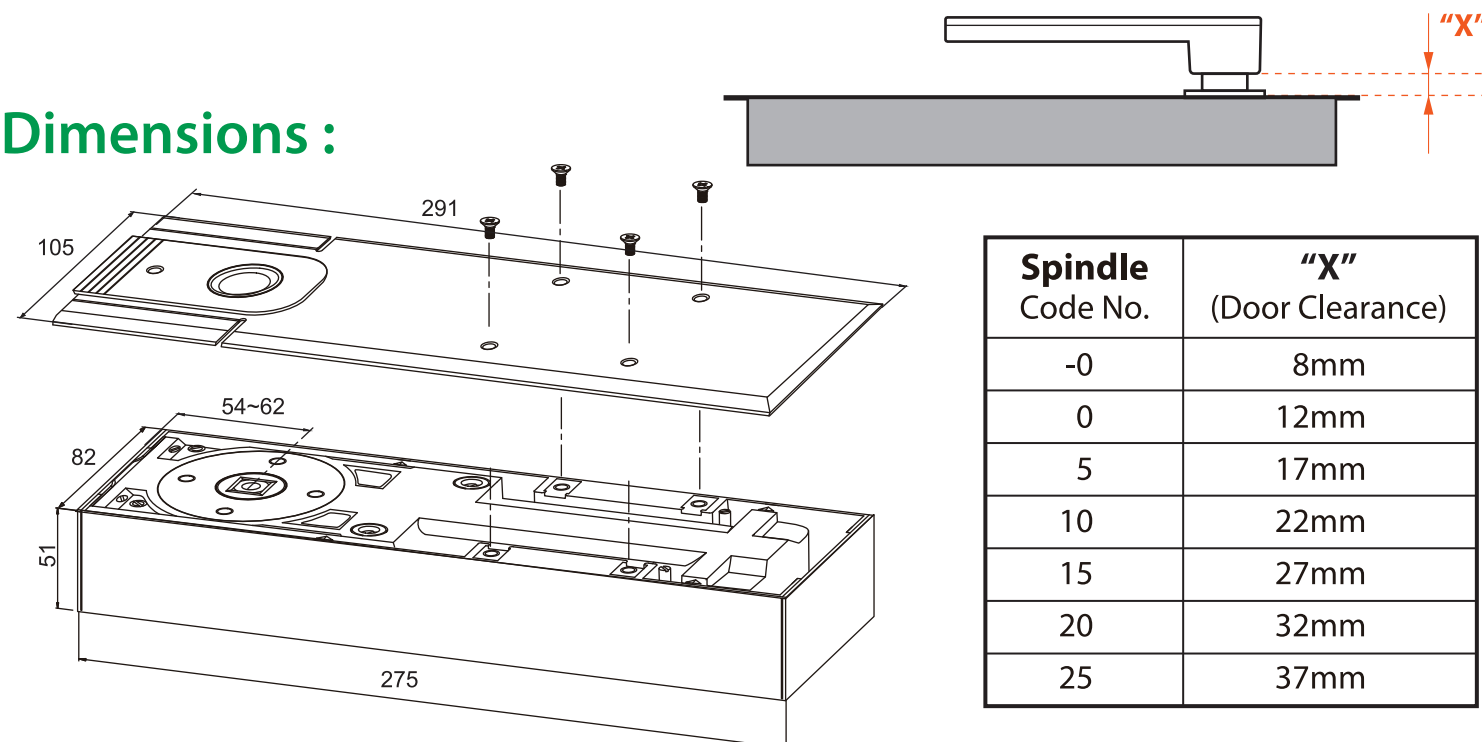

Technical Data

- Adjustable spring strength/ closing force from 25~54Nm. (EN3~EN6)
- Max. Door Width 1400mm.
- Max. Door Weight 300kgs.


Function

- Max. Door opening angle at 180°.
- Hydraulic control from 0°~180°.
- Mechanical hold-open at 90°(standard).
- Non-hold open(optional).

Closing ranges

- Two closing speed variable by valve adjustment provide full hydraulic control.
- Valve 1: 130°-20° closing speed.
- Valve 2: 20°-0° latching range.

Max. opening 180°

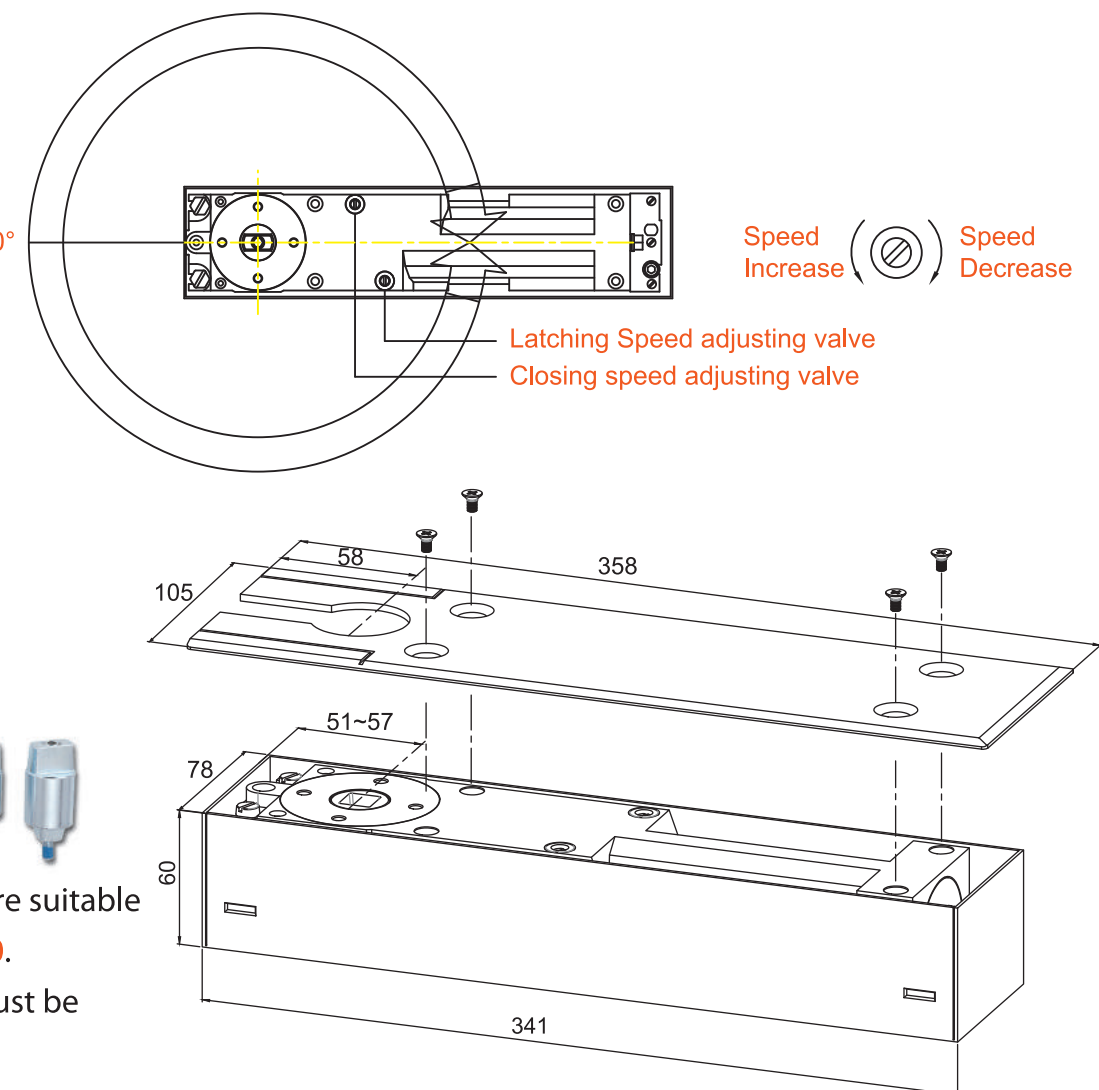

- Interchangeable spindles are suitable for both GTS-750 & GTS-800.
- Interchangeable spindle must be ordered separately.