



HGT-100_(EN3) Hydraulic patch fitting

According to EN1154:1996-11 + A1:2002-12+AC:2006-06

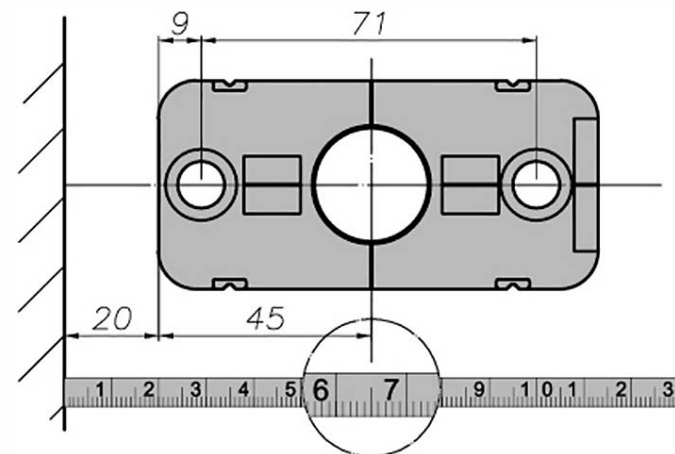

Glass Cutout(HGT-100/HGT-100H):

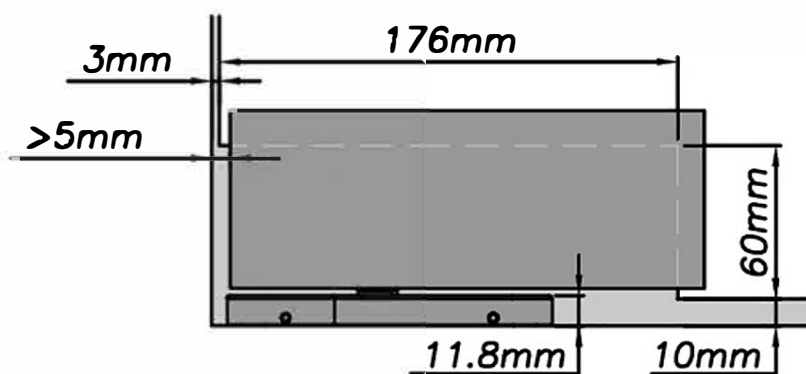


Application Ranges:

- Suitable for single & double action door.
- Available for light & medium duty door.
- Adjustable Closing & Latching Speed.
- Two non-critical control valves provide dual speed hydraulic closing.

Finishes:

- PSS: Polished stainless steel.
- SSS: Satin hairline stainless steel.
- MBK (mat black) / MS (mat silver) by order.

Recommendation

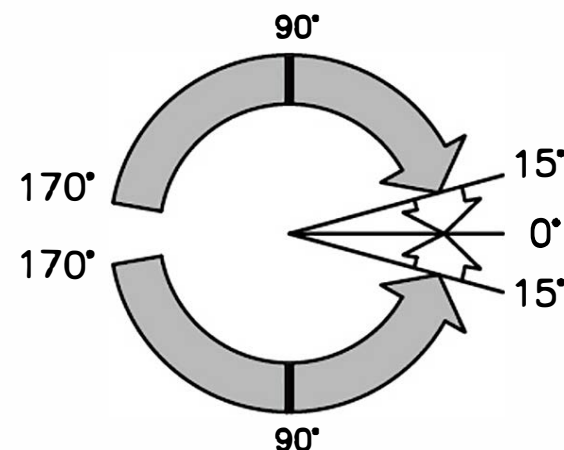

Power Size

- Max. door width (mm) 1000
- Max. door weight (kg) 100
- Available glass thickness (mm) 10~12

HGT-100H_(EN5) Heavy duty type **NEW**




Finishes:

- PSS: Polished stainless steel.
- SSS: Satin hairline stainless steel.
- MBK (mat black) / MS (mat silver) by order.

Power Size

- Max. door width (mm) 1250
- Max. door weight (kg) 110
- Available glass thickness (mm) 10~13.5

EN5

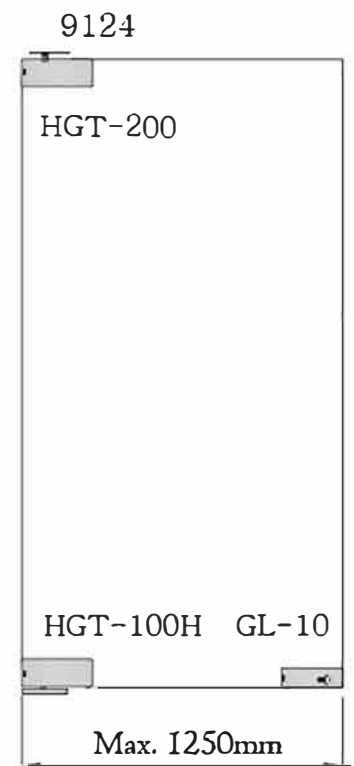

HGT-100W Designed for wood panel



Product Features:

- Fixed power size 3 EN compliance.
- Adjustable closing & latching speed.
- Maximum door opening angle at 150°.
- Maximum door control opening angle at 150°.
- Mechanical hold-open at 90° (optional upon request)

Power Size

- Max door width (mm) 1000
- Max door weight (kg) 100
- Minimum timber door thickness (mm) 40

