

GCC[®]



LL-20MG

Magnetic Glass Lever Lock



Ultra-Silent operation

LL-20MG

Magnetic Glass Lever Lock Installation Instruction


FEATURES :

- Designed for glass panel
- Low noise operation
- Spring force adjustable
- Suitable for glass thickness 8~10mm (12mm is available by order)
- 16/18mm handle holder for options
- DIN Left to Right side is changeable
- Suitable for a narrow frame
- Patented

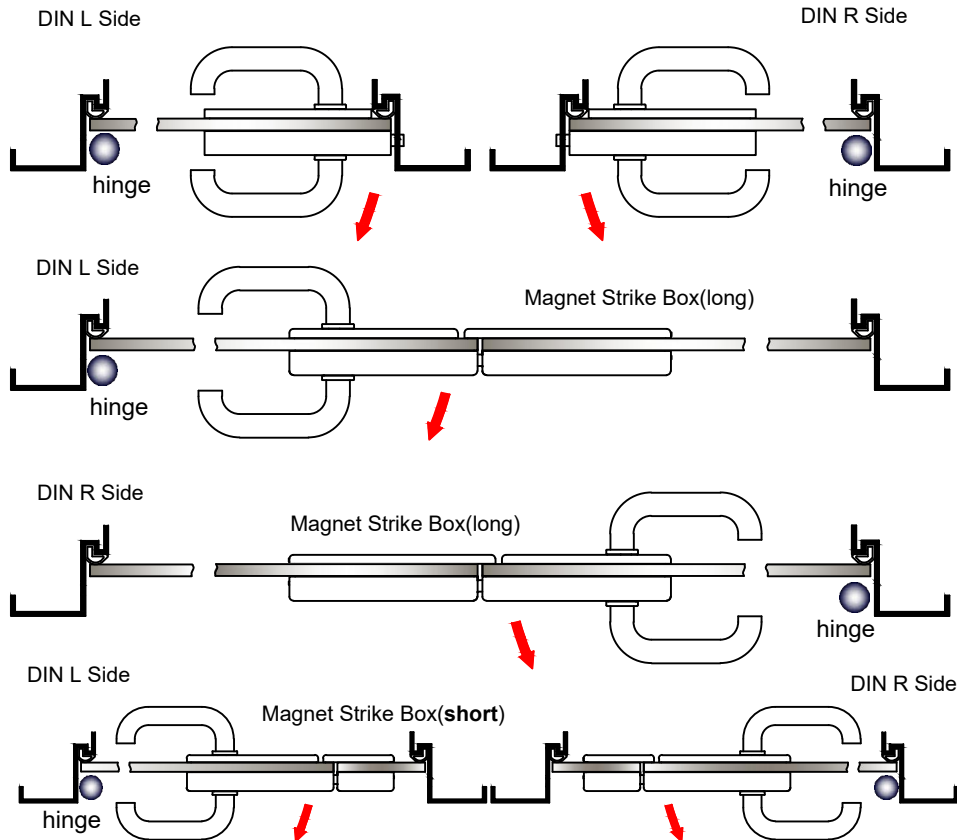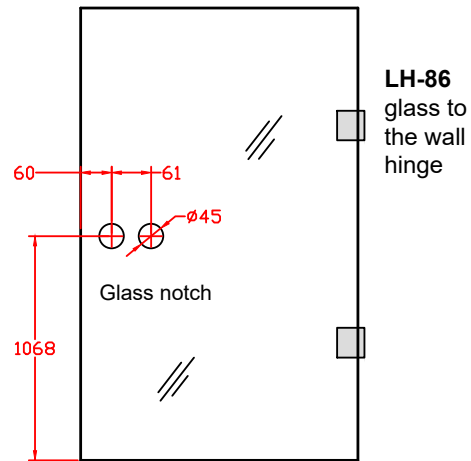

How to adjust the spring force


1. The set screw is to adjust the spring force.
2. To work with solid handle, please turning allen key anti-clockwise to get suitable power
3. factory setting is for hollow tube handle

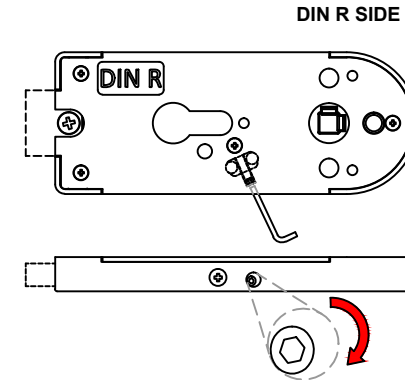


Notification:

- A the handle holder with 16/18mm for options, 16mm as factory setting. the drawing ①
 B Maximum clamping force 3NM, the drawing ②
 C Max working temperature 60°C.
 D Magnetic lock holder are well acceptable with the narrow frame,
 to make sure wooden and aluminum frame should be select the relative screw

LL-20MG explode diagram

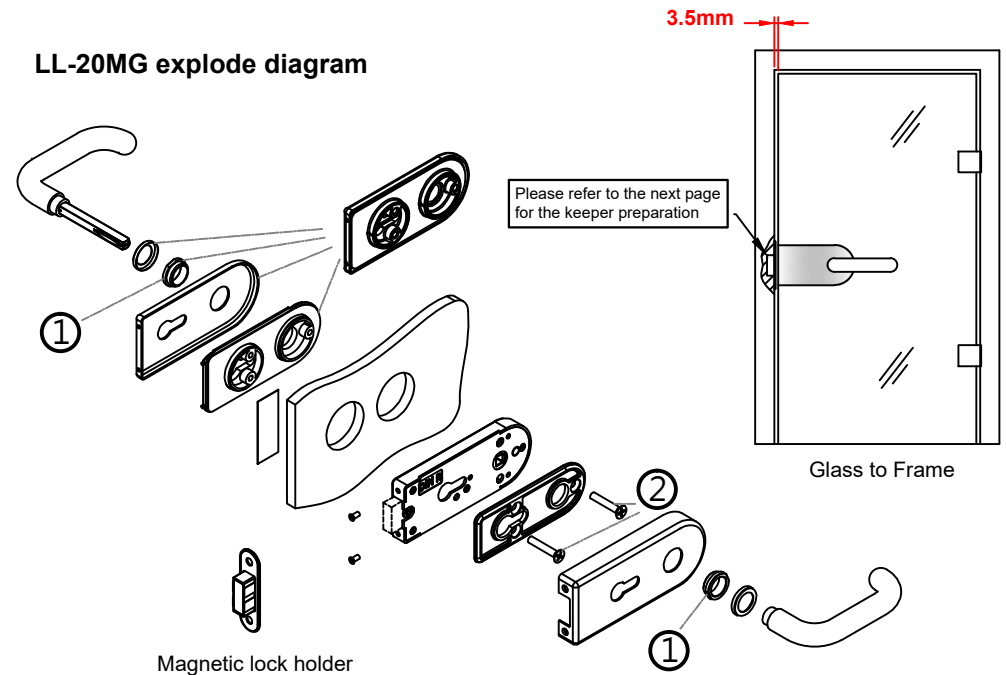


LL-20MGS Magnetic Glass Strike Box(short) Glass Notch

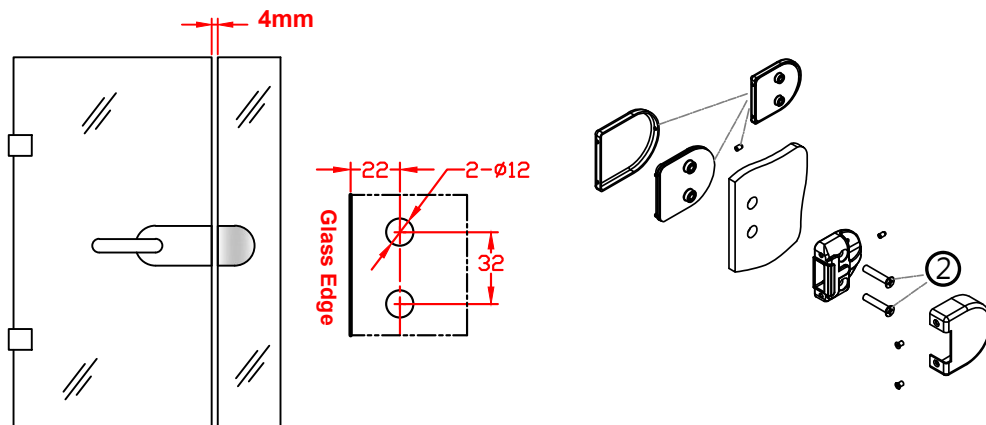

LL-20MH Magnetic holder preparation

For a wooden frame hole dimension is L:36mm W:15mm D:13mm

For an aluminum frame hole dimension is L:36mm W:15mm

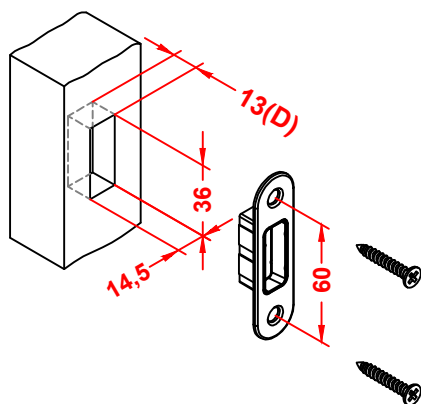

Should you require any further technical assistance, please feel free to contact us:

Email: gcctw@ms7.hinet.net

GCC[®]

LL-20MG Magnetic Glass Lever Lock



LL-20MG(SNK)



LL-20MG

Website