

# G150A

ANSI G1 Compliance

Rack & Pinion Door Closer  
with Standard Arm



## Product Features:


- Adjustable power size 1~6
- Adjustable closing & latching speed
- Adjustable backcheck
- Adjustable delay
- Thermo-constant valve
- Trip-pack standard, additional arms optional
- One-piece cast-iron construction
- All function regulators on same side for easier adjustment
- Rack & Pinion
- Single action door
- Non-handed installation

| Power Adjustment            |          | 1 | 2            | 3            | 4             | 5             | 6             |
|-----------------------------|----------|---|--------------|--------------|---------------|---------------|---------------|
| Door width<br>[Inches (mm)] | Interior | ♿ | 34"<br>(864) | 38"<br>(965) | 48"<br>(1219) | 54"<br>(1372) | 60"<br>(1524) |
|                             | Exterior | - | 8.5lb-f      | 30"<br>(762) | 36"<br>(914)  | 42"<br>(1067) | 48"<br>(1219) |

## Finishes:


- Painted-silver, brown, gold, black, white & other RAL colors upon request & discussion

## Dimensions:

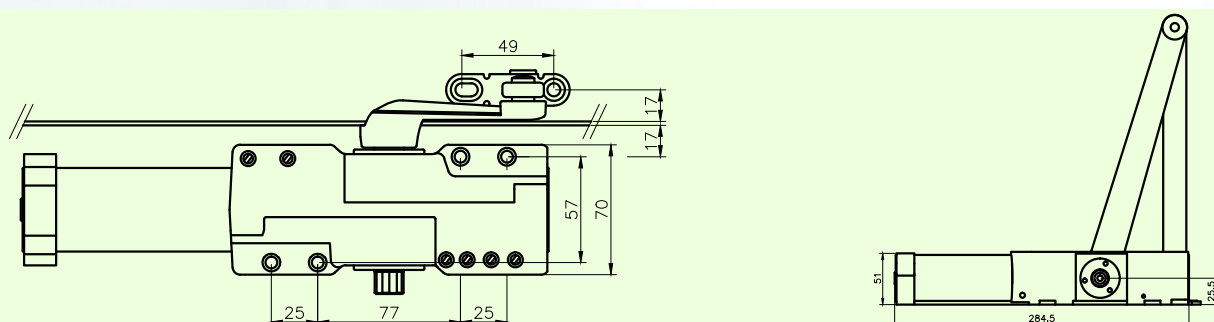


## Application Ranges:

- Standard door mount on pull side  
max door open 120°
- Transom mount on push side  
max door open 120°
- Parallel bracket application on size 1~6  
max door open 90°/120°/180°  
upon mounting positions

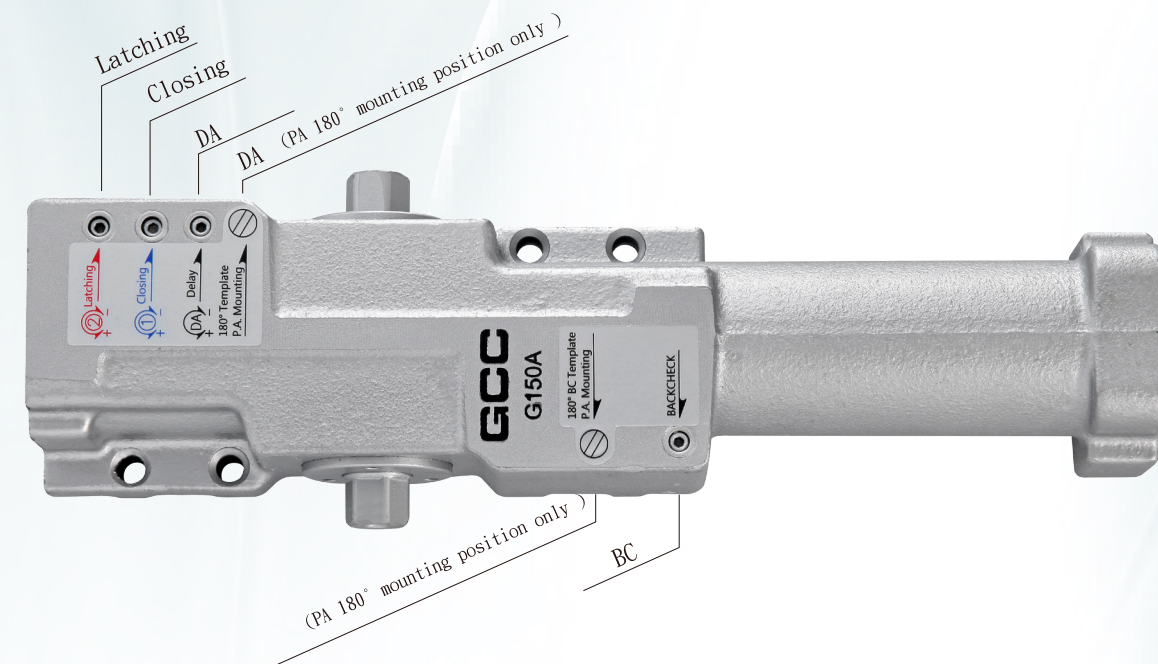


## Accessories

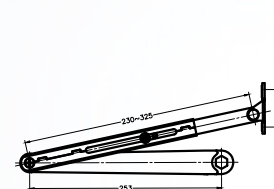


### Standard Arm

- Non-Handed
- UL Certified




### Parallel Bracket

- UL Certified



### Plastic Cover


- Non-Handed




### Spacer

- To Support PA Shoe

## Options

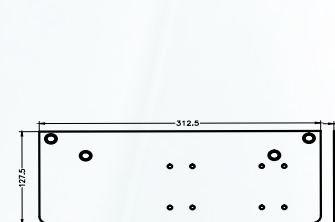


### Drop Plate

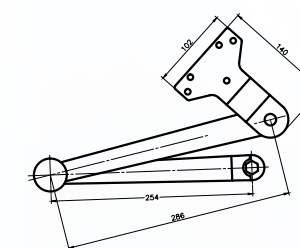

### Extra Duty Arm

- Non-handed

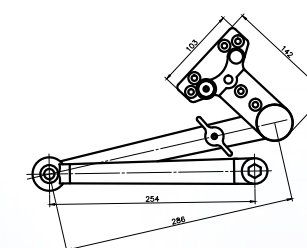

### Hold-Open Cush Arm

- Non-handed